

Waterproof cable connector




Waterproof cable connector

Technical Parameter



Model	D1 mm	L1 mm	Cable diameter mm	D2 mm	D3 mm	L2 mm	H1 mm	H2 mm	H3 mm
PG7	13-13.5	8	3~6.5	17.9	15.6	15.4	5.2	4.7	14.9
PG9	16-16.5	8	4~8	21.9	18.6	16.1	5.3	4.9	15.8
PG11	19-19.5	9	5~10	23.1	21.4	16.7	5.7	4.4	16.7
PG13.5	21-21.5	9	6~12	25.4	23.4	18.4	5.8	5	18.6
PG16	23-23.5	10	10~14	30	25.5	20.7	5.5	5.4	19.4
PG19	24-24.5	10	12~15	29.5	27.3	21.3	6.4	5.5	19.8
PG21	29-30	12	13-18	35.5	32.5	23.3	6.7	5.4	21.9
PG25	30-31	12	16-21	36.5	34.4	24.2	6.7	5.9	23.1
PG29	37-38.5	12	18-25	44.6	41.1	27.8	7.0	6.5	25.8
PG36	48-49.5	16	22-32	57.8	51.2	28.5	8.1	7.1	27.3
PG42	55-56.5	18	32-38	65	59.9	35.3	8.2	8.0	30.9
PG48	60-61.5	20	37-44	70.4	67.9	37.1	8.6	8.5	35.1
PG63	70.5-71.5	26	42-50	82.7	74.6	39.2	9.6	8.3	38.8

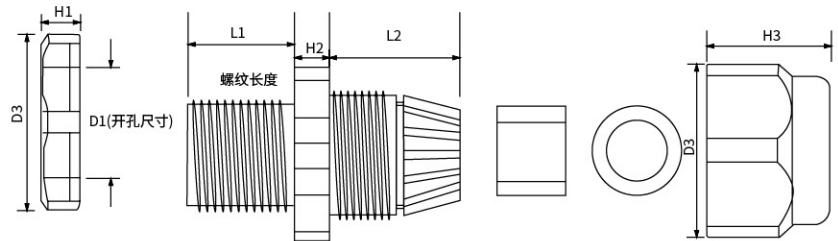

Technical Parameter



Model	D1 mm	L1 mm	Cable diameter mm	D2 mm	D3 mm	L2 mm	H1 mm	H2 mm	H3 mm
M12X1.5	12	8	3~6.5	17.7	15.7	15.3	4.9	4.7	14.9
M16X1.5	16	8	4~8	21.7	18.5	16	4.9	5	15.8
M18X1.5	18	9	5~10	23.8	21.6	16.8	5	4.5	16.8
M20X1.5	20	9	6~12	26.5	23.3	19	6.4	5.1	18.7
M22X1.5	22	10	10~14	29.8	26.4	20.9	6.6	5.5	18.8
M24X1.5	24	10	12~15	29.9	27.4	21.1	6.5	5.5	19.7
M25X1.5	25	12	12~15	32.6	27.4	21.2	6.5	5.4	19.7
M30X1.5	30	12	16-21	36.7	34.6	24.4	6.8	5.9	22.7
M32X1.5	32	12	16-21	38.6	34.5	24.1	6.8	5.9	22.7
M36X1.5	36	12	18-25	45.2	41.3	24.8	7.2	6.6	24
M40X1.5	40	18	22-32	51.5	51.3	27.8	8.2	7.2	27.5
M50X1.5	50	20	32-38	60.1	59.6	34.9	8.2	8	30.8
M63X1.5	63	26	37-44	74.1	68.2	37.5	9.2	8.5	34.3

