

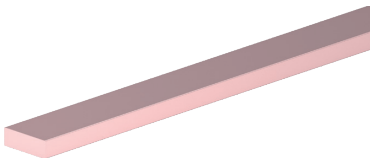


Standard Hard Copper Busbar

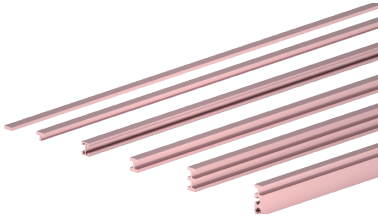


Standard Hard Copper Busbar

GRL hard copper busbar products are made of T2 copper material, including various models such as standard copper busbars, T-shaped busbars, 2T-shaped busbars, and 3T-shaped busbars. The insulation processes include tubing, PVC dipping, PA12 extrusion, and epoxy resin coating. The cross-sectional area can be customized according to customer requirements. Additionally, Jinlaile Electric can customize copper busbar products with special shapes and sizes, offering professional solutions tailored to your specific needs and product applications.

Standard Copper Busbar

Dimensions a×b×Length (mm)	Cross-Sectional Area (mm ²)	Current Carrying Capacity at Busbar Temperature of 65°C	Order Number
12×5×2400	60	200	DN51618
12×5×790			DN51381
12×5×590			DN51382
15×5×2400	75	250	DN51619
20×5×2400	100	320	DN51620
20×5×790			DN51383
20×5×590			DN51384
25×5×2400	125	400	DN51621
30×5×2400	150	450	DN51622
30×5×790			DN51387
30×5×590			DN51388
12×10×2400	120	360	DN51623
12×10×790			DN51389
12×10×590			DN51390
20×10×3600	200	520	DN51140
20×10×2400			DN51624
20×10×790			DN51391
20×10×590			DN51392
30×10×3600	300	630	DN51204
30×10×2400			DN51625
30×10×790			DN51393
30×10×590			DN51394

Custom-Shaped Copper Busbar

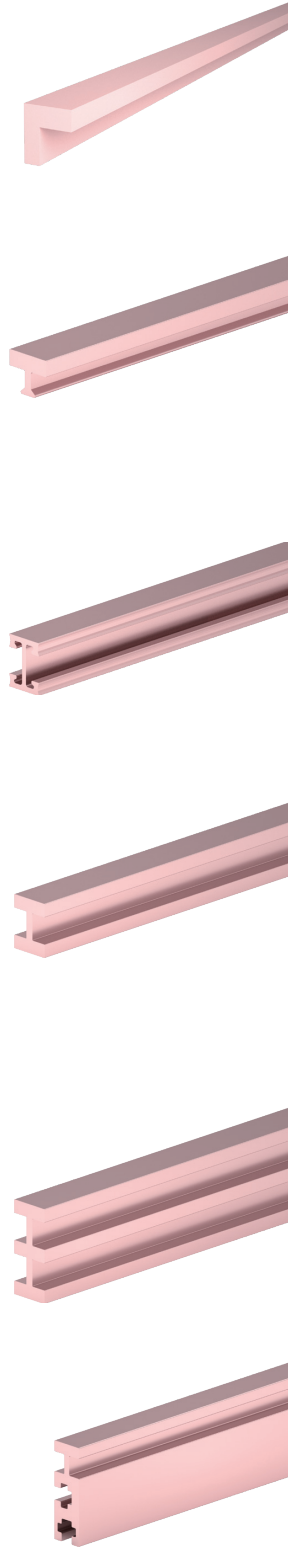

Cross-Sectional Area (mm ²) × Length (mm)	Current Carrying Capacity at Busbar Temperature of 65°C	Order Number
100/2400	320	DN51001
400 × 3600	850	DN51000
400 × 2400		DN51023
400 × 790		DN51024
400 × 650		DN51025
400 × 590		DN51026
400 × 450		DN51027
500 × 3600		1250
500 × 2400	DN51609	
500 × 790	DN51395	
500 × 650	DN51226	
500 × 590	DN51396	
500 × 450	DN51225	
720 × 3600	1600	DN51190
720 × 2400		DN51608
720 × 790		DN51397
720 × 650		DN51831
720 × 590		DN51398
720 × 450		DN51838
1140 × 3600	2500	DN51227
1140 × 2400		DN51187
1140 × 790		DN51399
1140 × 653		DN51189
1140 × 590		DN51400
1140 × 453		DN51188
1600 × 2400	3200	DN51610
1600 × 692		DN51378
1600 × 492		DN51377

